


# ROME

Series

## BH-EP

## Hinge-Wheel Combination Harrow

For Caterpillar Challenger Series or track-type tractors

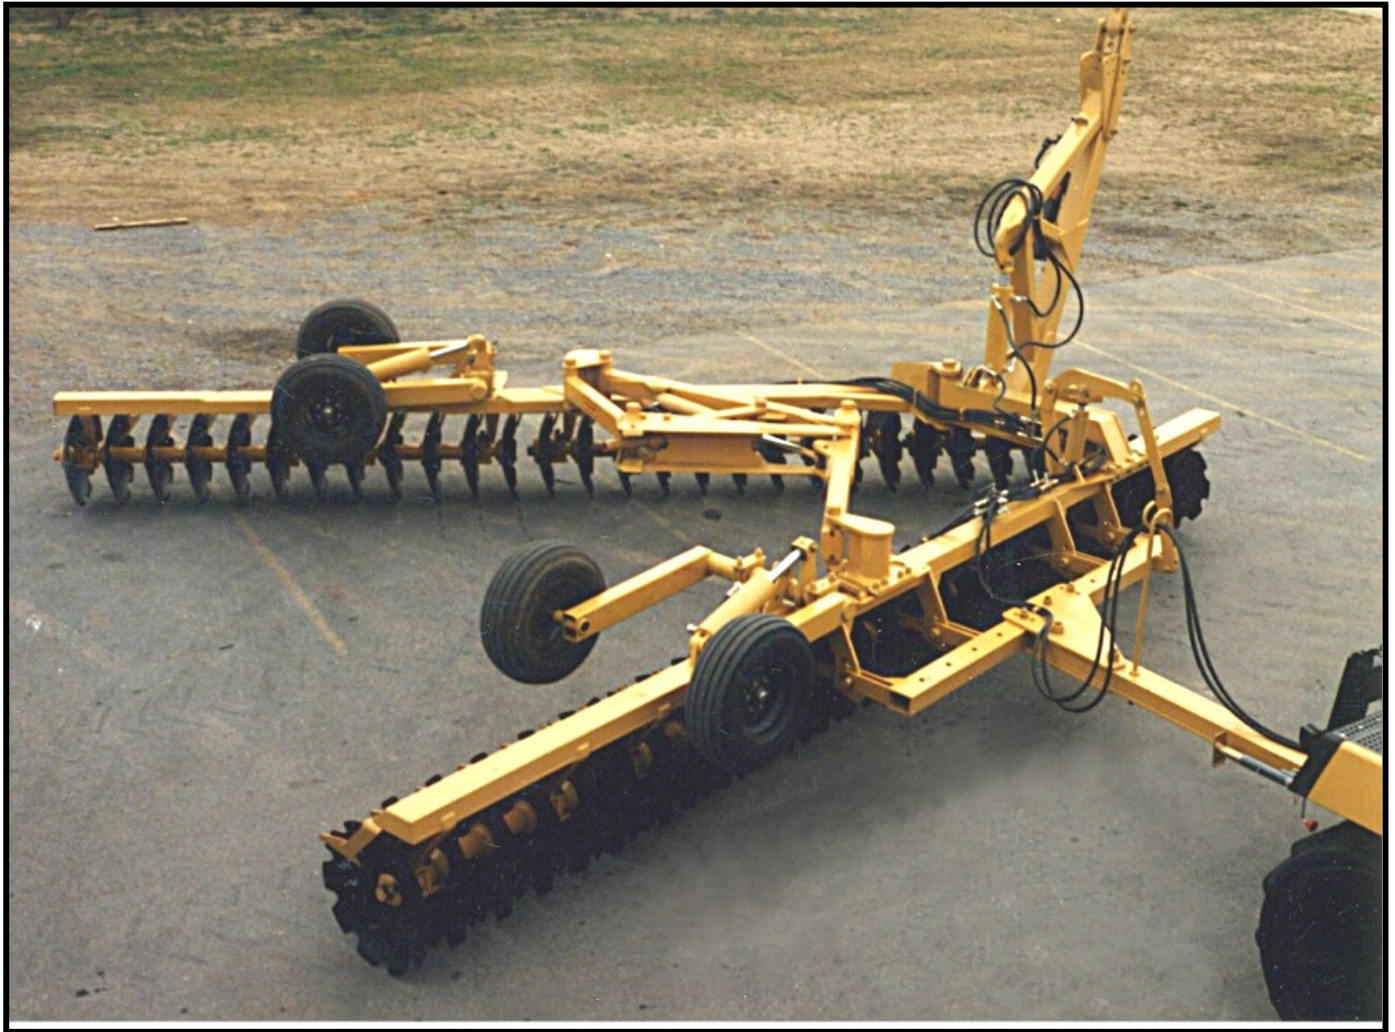

ROME Model BH-540EP End Pull Special Harrow

### FEATURES

- ! Completely new , patented hinge-wheel offset harrow line concept - built rugged and designed for long, trouble-free operation.
- ! Combines the superior uniform leveling and mixing capability of the hinge harrow with the transportability of the wheel harrow.
- ! End pull transport capability allows the operator to go from plowing in the field to road transportation in a few minutes with minimum effort.
- ! New gang assembly design positions the bearing and spacer assemblies behind the gang carriers in order to provide additional clearance which minimizes clogging.
- ! Reinforced scrapers clean disk blades more efficiently.
- ! Full range of adjustments to control depth of penetration - up to 9 inches maximum.
- ! Angle adjustment from 0° to 45°. "On the go" adjustments with hydraulic control.



# Specifications

## Model BH-EP End Pull Special Harrow

11" (279 mm) Disk Spacing; 1-5/8" (41.3 mm) Round Axles. Equipped with Greaseable Tapered Roller Bearings.

Model Number	Width of Cut ft. (m)	No. of Disks	* Suggested		No. of Tires and Ply	Wt. per Disk lbs. (kg)	Approx. Net Wt. lbs. (kg)
			DB. PP. (DBkgP)	DB. HP.			
BH-480EP	21' - 0" (6401)	48	14400 - 16400 (6532 - 7439)	192 - 219	(4) 11 L x 15 10 Ply	265 (120)	12,762 (5788)
BH-540EP	24" - 0" (7315)	54	17900 - 19900 (8119 - 9027)	239 - 265	(4) 11 L x 15 10 Ply	287 (130)	15,498 (7030)

\*Drawbar Pounds Pull, PTO Horsepower and Drawbar Horsepower are suggested ranges and vary according to soil conditions and weight added to harrow. Harrow weights shown are with standard 28" x 5/16" thick, cutout, deep concavity disk blades.


### Standard Equipment

- ‡ 28" (711 mm) dia., 5/16" (8 mm) thick, cutout, (notched) deep concave disk blades.
- ‡ Highway Service Tires: (4) Four 11L x 15 - 10 ply.
- ‡ Adjustable disk blade scrapers.
- ‡ Hydraulic Quick Coupler.
- ‡ Hydraulic Angle Control.
- ‡ Heavy Duty Bearing Wear Plates.
- ‡ End Pull Capability.
- ‡ Tongue Jack

### Optional Equipment

- ‡ Extra Heavy Duty Bearing Wear Plates.
  - ‡ Light Groups - All Models.
  - ‡ Disk Blades: Hard surfaced 28" (711 mm) dia., 5/16" (8 mm) thick, cutout, (notched) deep concave disk blades.
  - ‡ Furrow Filler Blade - Cutout or smooth.
- Note:**  
Per ASAE S290.1. Width of Cut will vary with gang angle and blade diameter.

### Transport Dimensions

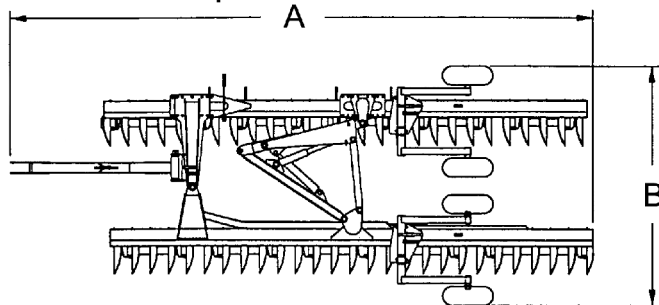

Minimum clearance of disk blades to road: 12" (305 mm)

Model Number	"A" Length	
	ft. in.	(mm)
BH - 480EP	26' - 9"	(8153)
BH - 540EP	29' - 5"	(8966)
Model Number	"B" Width	
	ft. in.	(mm)
BH - 480EP	11' - 8"	(3556)
BH - 540EP	14' - 4"	(3759)
Model Number	"C" Height	
	ft. in.	(mm)
BH - 480EP	11' - 6"	(3505)
BH - 540EP	11' - 6"	(3505)



## ROME PLOW EQUIPMENT CO., LLC

475 Sixth Street  
P.O. Box 48,  
Cedartown, GA 30125, USA  
[www.romeplow.com](http://www.romeplow.com)

Telephone: (770) 748-4450  
(800) 241-7860 (USA)  
Fax: (800) 553-2865 (USA)  
Fax: 770-748-4427

This document was created with Win2PDF available at <http://www.win2pdf.com>.  
The unregistered version of Win2PDF is for evaluation or non-commercial use only.  
This page will not be added after purchasing Win2PDF.