



Series:

RAFS

Bottomless Finishing Scraper

For use with tractors in the 225 – 500hp range.



FEATURES:

- Capable of utilizing a single or dual mast machine control system.
- Excellent for all leveling applications.
- Smooth and maintain access roads or haul roads.
- Rework washed out terraces.
- Rigid construction insures leveling accuracy.
- Front tongue can be folded in for easy loading onto a trailer.
- Reversible and replaceable side cutter blades.
- Offset walking beam transport unit provides stability at higher operating speeds.
- Rear operating axle can be split to walk contours.



Scan the code to visit our
website today:

www.romeplow.com



Specifications:

Series RAFS Bottomless Finishing Scraper

Model Number	Capacity yd ³ (m ³)	Overall Dimensions			Suggested Engine Hp		Net Weight lbs (kg)
		Length ft/in (m)	Width ft/in (m)	Height ft/in (m)	4 Mph	6 Mph	
RAFS-16	9.5 (7.3)	20'-0" (6.1)	16'-3" (5.0)	4'-6" (1.4)	225	275	12,950 (5886)
RAFS-18	10.7 (8.2)	20'-0" (6.1)	18'-3" (5.6)	4'-6" (1.4)	250	300	13,850 (6295)
RAFS-20	11.9 (8.4)	20'-10" (6.4)	20'-3" (6.2)	4'-6" (1.4)	300	350	14,875 (6761)
RAFS-24	14.3 (11)	20'-10" (6.4)	24'-3" (7.4)	4'-6" (1.4)	350	400	15,685 (7130)

* Engine horsepower is a suggested range and varies according to soil conditions and weight added to scraper.


NOTE: This scraper requires hydraulic control. One rear tractor hydraulic circuits required for scraper operation.

Standard Equipment:

- Breakaway front tongue.
- Four 21.5 x 16.1 tires on the operating transport.
- Adjustable front hitch clevis height.
- Reversible and replaceable cutting edges and side cutter blades.
- Drawbar jack and safety chain.

Optional Equipment:

- Laser/GPS mast.
- Dual slope hose kit.
- Light group.
- Scraper hitch in lieu of pintel hitch.

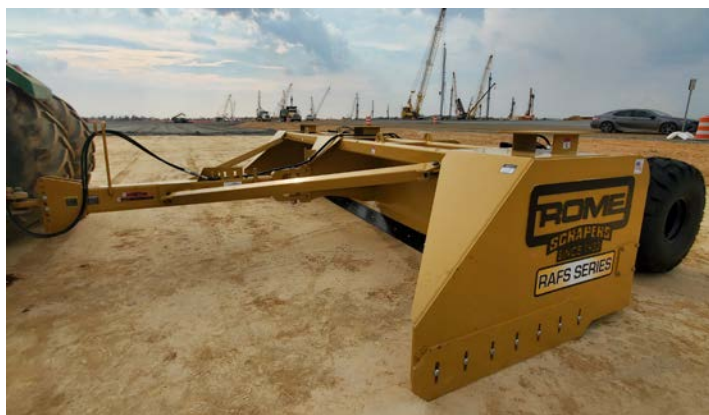

Rome Plow

475 Sixth Street

P.O. Box 48

Cedartown, GA 30125, USA

Telephone: 770.748.4450

Fax: 770.748.4427

Website: romeplow.com