

ROME

Series:

BH-EP

Hinge Wheel Combination Harrow

For use with tractors in the 254 – 351hp range.



FEATURES:

- Completely new, patented hinge wheel offset harrow line concept. Built rugged and designed for long, trouble free operation.
- Combines the superior uniform leveling and mixing capability of hinge harrows with the transportability of wheel harrows.
- End pull transport capability allows the operator to go from plowing in the field to road transportation in a few minutes with minimum effort.
- Full range of adjustments allows the precise control of penetration depth hydraulically.
- “On the go” angle adjustments from 0° to 45° are hydraulically controlled from the operator’s seat.
- New gang assembly design positions the bearing and spacer assemblies behind the gang carriers in order to provide additional clearance to minimize clogging.
- Reinforced scrapers clean disk blades more efficiently.
- Also available with Timken oil bath tapered roller bearings.



Scan the bar code to visit
our website today:
www.romeplow.com



Specifications:

Series BH-EP Hinge Wheel Combination Harrow

11" (279mm) disk spacing; 1-5/8" (41mm) round axles; Equipped with Timken dual tapered roller bearings.

Model Number	Width of Cut ft/in (m)	Number of Disks	Suggested Engine Horsepower	Weight Per Disk lbs (kg)	Number of Tires	Net Weight lbs (kg)
BH-480EP	21'-0" (6.4)	48	254 – 290	265 (120)	4	12,762 (5789)
BH-540EP	24'-0" (7.3)	54	316 – 351	287 (130)	4	15,498 (7030)
BH-620EP	27'-0" (8.2)	62	331 – 376	261 (118)	4	16,200 (7348)

*Engine horsepowers are suggested ranges and vary according to soil conditions and weight added to harrow. Per ASAE S290.1 – Width of cut will vary with gang angle and disk blade diameter.

NOTE: This harrow requires hydraulic control. One rear tractor hydraulic circuit required for harrow operation.


Standard Equipment:

- 28" (711mm) diameter x 5/16" (8mm) thick, cutout (notched) deep concavity disk blades.
- Adjustable disk blade scrapers.
- End pull transport assembly includes: 11L x 15 highway service tires with hydraulic angle control group.
- Heavy duty bearing wear plates.
- Drawbar jack stand and safety chain.
- Furrow filler blade.
- Hydraulic quick coupler.

Optional Equipment:

- Extra heavy duty bearing wear plates.
- Light group.
- 28" (711mm) diameter x 5/16" (8mm) thick dura- faced cutout (notched) deep concavity disk blades.
- Farrow filler.

Transport Dimensions

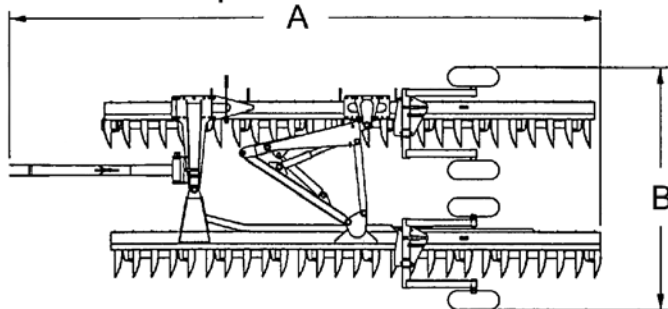

Minimum clearance of disk blades to road: 12" (305 mm)

Model Number	"A" Length ft/in (m)	"B" Width ft/in (m)	"C" Height ft/in (m)
BH-480EP	26'-9" (8.2)	11'-8" (3.6)	11'-6" (3.5)
BH-540EP	29'-5" (9.0)	14'-4" (3.8)	11'-6" (3.5)



Rome Plow

475 Sixth Street

P.O. Box 48

Cedartown, GA 30125, USA

Telephone: 770.748.4450

Fax: 770.748.4427

Website: romeplow.com